

ROBERT E. BUSHNELL*†

HENRY M. ZYKORIE
JOSEPH G. SEEBER°
JOHN C. BROSKY°+*
DARREN R. CREW+*
MATTHEW J. LESTNA†*

MICHAEL D. PARKER
DANIEL A. GESELOWITZ, Ph.D.
(REG. PATENT AGENTS)

† ADMITTED IN MARYLAND
° ADMITTED IN VIRGINIA
+ ADMITTED IN PENNSYLVANIA
‡ ADMITTED IN NEW YORK
* NOT ADMITTED IN D.C.

R. E. BUSHNELL

ATTORNEY AT LAW

1522 K STREET, N.W., SUITE 300
WASHINGTON, D.C. 20005-1202
UNITED STATES OF AMERICA

30 March 1999

INTELLECTUAL PROPERTY LAW

TELEPHONE (202) 638-5740
(202) 408-9040
FACSIMILE (202) 628-0755
FACSIMILE (202) 289-7100
FACSIMILE (202) 628-3835
(410) 747-0022

E-MAIL: 2064566@MCIMAIL.COM

- ☐ U.S. Postal Service
☐ Via Local Courier
☐ Via International Courier
☐ Via Facsimile No. _____
☐ Via E-Mail Attachment
☐ Please Acknowledge Receipt

Attorney Docket: P55657

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Submitted herewith is the following patent application:

Inventor: 1) JAE-ICK HO

Title: APPARATUS FOR INPUTTING AND DETECTING A DISPLAY
DATA CHANNEL IN MANUFACTURING A MONITOR

Please find attached hereto an application for patent which includes: Specification and Abstract, Claims, original Declaration And Power of Attorney, Assignment, and a certified copy of the foreign priority document identified below:

Verified Showing of Small Entity Status: **NO**

Drawings: Formal drawings, 5 sheets, Figures 1 through 6

Claim of priority under 35 U.S.C. §119: **YES**

** The Republic Of Korea Application No. 10975/1998 filed on 30 March 1998.

FEE (see formula below): CHECK IS NOT ENCLOSED

Basic Fee \$380/760 **\$760.00**

Additional Fees:

Total number of claims in excess of 20: ____ times \$9/18 . **\$0.00**

Number of independent claims in excess of 3: ____ times \$39/78 **\$0.00**

Multiple Dependent Claims \$130/260 **\$0.00**

An Assignment is likewise enclosed: Recording Fee \$40 . . **\$0.00**

Filing Non-English specification **\$0.00**

TOTAL FEES FOR THE ABOVE APPLICATION **\$760.00**

Assistant Commissioner for Patents

30 March 1999

Page Two

Docket No.: P55657

Inventor: 1) JAE-ICK HO


Title: APPARATUS FOR INPUTTING AND DETECTING A DISPLAY
DATA CHANNEL IN MANUFACTURING A MONITOR

In view of the above, it is requested that this application be accorded a filing date pursuant to 37 CFR 1.53(b).

Please address all correspondence to:

Robert E. Bushnell
1522 K Street, N.W.
Suite 300
Washington, D.C. 20005

Respectfully submitted,



Robert E. Bushnell
(Registration No. 27,774)
Payor No.: 008-439
Attorney for the Applicant
1522 K Street, N.W.
Suite 300
Washington, D.C. 20005

Telephone: (202) 638-5740
Telefacsimile: (202) 628-0755

REB/kf

TITLE

**APPARATUS FOR INPUTTING AND DETECTING
A DISPLAY DATA CHANNEL IN MANUFACTURING A MONITOR**

CLAIM OF PRIORITY

This application makes reference to, incorporates the same herein, and claims all benefits accruing under 35 U.S.C. §119 from an application for *Apparatus For Inputting And Detecting A Display Data Channel In Manufacturing A Monitor* earlier filed in the Korean Industrial Property Office on the 30th day of March 1998 and there duly assigned Serial No. 1998/10975.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to the transmission and detection of a display data channel during the manufacture of a visual monitor, and, more particularly, to an apparatus for enhancing manufacturing productivity while concomitantly reducing unit cost by automatically input and detecting a display data channel during the manufacture of monitors.

Description of Background Art

In general, before packaging and shipping, manufacturers occasionally subject video monitors for computers to an operability test by applying and examining the visual display of data during

1 transmission of the data via a display data channel (hereinafter, sometimes referred to as a DDC) to
2 each of the monitors. The input of the DDC to each monitor is performed with either a scanner or
3 a mouse, and a computer is used to detect the DDC on the monitor to which the scanner or the mouse
4 is connected, and the monitor to be examined is connected.

5 Under current practice, a worker operates a scanner or a mouse in order to input the display
6 data channel into the monitor being tested. Each monitor travelling along an assembly line is briefly
7 stopped at a position accessible to a personal computer that serves as a test set. In order to input and
8 detect the DDC, the worker either clicks the appropriate button of a mouse or scans the bar coded
9 information from a label (*e.g.*, for example, a label bearing the serial number of the monitor) that is
10 being dispensed for application to the rear of the newly manufactured monitor. When the worker
11 clicks the mouse, or alternatively, scans the information from the label, the DDC for the monitor is
12 applied to the personal computer of the test set. When the DDC has been normally input into the
13 personal computer, the personal computer drives its own monitor to visually display a message
14 indicating that the operation has been successively completed. If the DDC is not input into the
15 personal computer for some reason, the personal computer drives its monitor to display an error
16 message. I have noticed however, that in order to apply and detect the display data channel for each
17 newly manufactured monitor, the worker must operate a mouse, or a scanner for each test of each
18 newly manufactured monitor. Moreover, I have found that the worker must separately, visually
19 identify the messages which are displayed on the screen of the monitor of test set personal computer,
20 for each monitor that travels along the assembly line. Furthermore, since the worker must operate
21 the mouse or the scanner while visually identifying each message displayed on the monitor of the

1 test set that corresponds to the input and detection of the DDC, a substantial number of man-hours
2 is required during each shift in order to test each newly manufactured monitor.

3 SUMMARY OF THE INVENTION

4 It is an object of the present invention to provide an improved apparatus and process for
5 applying and detecting data transmitted to a monitor via a display data channel.

6 It is another object to provide an improved apparatus and process for automatically applying
7 and detecting data transmitted to a monitor via a display data channel, during the manufacture of the
8 monitor.

9 It is still another object to provide an apparatus and process able to individually test newly
10 manufactured video monitors while minimizing the number of operational steps required during the
11 performance of each test.

12 It is yet another object to provide an apparatus and process able to individually test newly
13 manufactured video monitors while reducing the amount of time required to perform each test.

14 It is still yet another object to provide an apparatus and process that simplifies the testing of
15 each newly manufactured video monitor.

16 The present invention has been made to overcome the above described problem of the prior art. It
17 is an object of the present invention to provide an apparatus for input and detecting a display data
18 channel in manufacturing a monitor capable of improving a productivity of monitors by
19 automatically input and detecting a display data channel of a monitor in manufacturing the monitors,
20 thereby reducing a manufacturing cost of the monitor.

1 These and other objects may be attained with apparatus and processes for applying and
2 detecting a display data channel through which data for a monitor is transmitted to a computer during
3 the manufacture of a monitor. Embodiments of the present invention contemplate an input device
4 that applies the display data channel for the monitor into the computer; a driver that supplies the
5 input device with predetermined electric signals; an interface that indicates whether the display data
6 channel for the monitor has been applied to the computer, generates the same voltage signal as an
7 initial signal, and switches the initial signal at a different time in accordance with the determination
8 about the application of the display data channel; and a controller that regulates the driver by
9 generating the predetermined electric signal, analyzes the output signal from the interface, and
10 determines whether or not the result obtained by the application of the display data channel is
11 correct.

12 The input device may includes a mouse, a scanner and a switch to select either the mouse or
13 the scanner, while the controller may be implemented with a programmable logic controller. The
14 interface may be constructed with a Zener diode connected with a pin coupled to the display data
15 channel running between the computer and the monitor, a transistor having a control electrode
16 coupled to an output terminal of the Zener diode and turned-on and turned-off in accordance with
17 the presence of the display data channel, a relay including a relay coil magnetized when the transistor
18 is turned-on and first and second relay switches turned-on when the transistor is turned-off, and a
19 light emitting diode that emitting light when the first relay switch is turned-on so that the application
20 of the display data channel can be identified. After the display data channel is applied to the
21 computer and the interface outputs a high frequency signal, the controller is able to determine that

1 the display data channel is normally applied to the computer when the interface outputs the same
2 signal as the initial signal at a first time, and after the interfacing section continues to output the high
3 frequency signal for a predetermined time after the first time interval, the controller determines that
4 the display data channel is abnormally inputted into the computer if the interface outputs the same
5 signal as the initial signal at a second time interval. The first time interval has a range of
6 approximately 750 milliseconds through approximately 1.5 seconds, and the second time interval
7 has a range of approximately 3.5 seconds through approximately 4.5 seconds.

8 When the display data channel is abnormally applied to the computer, the controller sounds
9 an alarm through a loud speaker. The driver may include a relay switch coupled in parallel to a
10 contact point for applying the display data channel of the input device and a relay coil that is
11 magnetized by the predetermined electric signal sufficiently to operate the relay switch. After a
12 control and detection signal is supplied to the monitor, the controller magnetizes the relay coil and
13 turns-on the relay switch at a predetermined time so that the display data channel is applied to the
14 monitor.

15 BRIEF DESCRIPTION OF THE DRAWINGS

16 A more complete appreciation of the invention, and many of the attendant advantages thereof,
17 will be readily apparent as the same becomes better understood by reference to the following detailed
18 description when considered in conjunction with the accompanying drawings in which like reference
19 symbols indicate the same or similar components, wherein:

20 FIG. 1 is a schematic view of an apparatus dedicated to the process of determining whether

1 a display data channel is inputted into a monitor in manufacturing monitors;

2 FIG. 2 is a schematic perspective view of an apparatus that uses a scanner for reading a bar
3 code of a label that is designed to be attached to the back side of each newly manufactured monitor;

4 FIG. 3 is a schematic view of apparatus for applying and detecting a display data channel
5 applied to newly manufactured monitors in accordance with the principles of the present invention;

6 FIG. 4 is a view showing the waveform of output signals obtained from the input of the
7 display data channel to newly manufactured monitors;

8 FIG. 5 is a view showing the construction of a circuit that may be used to selectively connect
9 a mouse or a scanner during the practice of the present invention; and

10 FIG. 6 is a schematic view of a conveyer system dedicated to transporting newly
11 manufactured monitors during fabrication and testing.

12 DESCRIPTION OF THE PREFERRED EMBODIMENT

13 Turning now to the drawings, FIG. 1 is a schematic view of an apparatus for inputting and
14 detecting the DDC during the manufacture of video monitors. The input and detection of the DDC
15 using scanner 6 and mouse 7 will be described in detail below. A worker operates scanner 6 or
16 mouse 7 so as to input the display data channel on the newly manufactured monitor 2 that is being
17 tested, and to detect the display data channel on that monitor. The DDC is applied to a monitor 2
18 by use of mouse 7 while monitor 2 rides upon pallet 60 that is being carried by conveyor belt 51;
19 conveyor belt 51 is stopped at a position that enables personal computer 3 to apply and detect the
20 DDC on the monitor. When monitor 2 is in place and the worker clicks a corresponding button of

1 mouse 7, the DDC for monitor 2 is received by personal computer 3 through an interface board 4.
2 When the DDC has been normally received by personal computer 3, personal computer 3 generates
3 a normal message, for example, a video signal corresponding to a variable visual video display on
4 monitor 1 of the expression OK. When the DDC has been abnormally received by personal
5 computer 3 or when interface board 4 or its cable is not properly connected to personal computer 3,
6 personal computer 3 may generate a video signal that drives monitor 1 to visually display an error
7 message, for example, the word ERROR or the expression NG, on its video screen.

8 When scanner 6 is used to apply the DDC to monitor 2, pallet 60 is stopped at a position that
9 enables personal computer 3 to receive and detect the DDC for monitor 2. The worker uses scanner
10 6 to read a bar code from a label that will be attached to a back side of monitor 2. When the worker
11 inputs information corresponding to monitor 2 into personal computer 3 by scanning the bar code
12 from the label for monitor 2, the DDC for monitor 2 is applied to personal computer 3 through
13 interface board 4. When the DDC has been normally received by personal computer 3, personal
14 computer 3 generates a normal message, for example, a video signal corresponding to a variable
15 visual video display on monitor 1 of the expression OK. When the DDC has been abnormally
16 received by personal computer 3 or when interface board 4 or its cable is not properly connected to
17 personal computer 3, personal computer 3 may generate a video signal that drives monitor 1 to
18 visually display an error message, for example, the word ERROR or the expression NG, on its video
19 screen.

20 FIG. 2 is a perspective view of a device that may be used with scanner 6 to read the bar code
21 from a label to be attached to the back side of monitor 2. The worker holds scanner 6 with one hand

1 and positions scanner 6 to read the bar code from monitor label 13 which is carried by rollers 11 and
2 12. I have noticed that in order to apply and detect the display data channel to monitor 2 according
3 to this practice, the worker must operate the mouse, or the scanner each time. Moreover, I have
4 found that there is another disadvantage attributable to the fact that the worker must separately,
5 visually identify the messages which are displayed on the screen of monitor 1 of personal computer
6 3, for each monitor 2 that travels along conveyor belt 51. Furthermore, since the worker is required
7 to operate mouse 6 and scanner 7 while visually identifying each message displayed on monitor 1
8 corresponding to the input and detection of the DDC, a substantial quantity of time is required in
9 order to test each monitor 2.

10 Hereinafter, apparatus and a process for applying and detecting the display data channel
11 during the manufacture of monitors in the practice of an embodiment of the present invention will
12 be described in detail with reference to the accompanying drawings. The like reference numerals
13 are used for the like elements.

14 As shown in FIG. 3, the apparatus according to the embodiment of the present invention
15 contemplates a circuit with a mouse 7 or a scanner 6 for inputting a display data channel (hereinafter,
16 referred to as DDC) of a monitor 2 into a personal computer 3 which is used for examining the DDC
17 during the manufacture of monitors, a relay 20 for including switch contacts R1 and R2 which are
18 in parallel connected with input contacts 10a and 10b of the mouse 7 or input contacts IOA and IOB
19 of the scanner 6 and a coil RC which is magnetized by a predetermined electric signal, for example
20 an electric signal outputted from a programming logic controller 100 as described below, and then
21 connects the switch contact R1 to the switch contact R2 so that an electric current is conducted, an

1 interfacing section 200 for indicating that the DDC of the monitor 2 is inputted into the computer
2 3 and for outputting an initial signal and the same signal which is switched at a different time as that
3 of generating the initial signal according to a result of inputting the DDC, and the programming logic
4 controller 100 (hereinafter, referred to as PLC) for generating a signal magnetizing the coil RC
5 forming the relay 20 so as to electrically connect the switch contact R1 to the switch contact R2, for
6 enabling the DDC of the monitor 2 to be inputted into the personal computer 3, and for determining
7 whether the inputting of the DDC is normal or abnormal by using a difference of voltage signals
8 from the interfacing section 200.

9 As shown in FIG. 3, the interfacing section 200 according to the present invention includes
10 a zener diode 201 which is connected with pins of ports 30 and 32 to connect the personal computer
11 3 to the monitor 2, a transistor 202 which has a base terminal connected to an output terminal of the
12 zener diode 201 and which is turned-on or turned-off based on the presence of the DDC, a relay 210
13 for including a relay coil 211 magnetized when the transistor 202 is turned-on and a first and second
14 relay switch 213 and 215 which are turned-on when the relay coil 211 is not magnetized, a light
15 emitting diode 220 for emitting light when an electric current is applied to the first switch, i.e. when
16 the DDC is inputted into the monitor 2, so that it is identified to input the DDC into the monitor 2,
17 and resistors R1, R2, and R3 for regulating current. When the second switch is turned-on, voltage
18 (-24V) for driving the PLC 100 is applied to the PLC 100.

19 With respect to FIG- 3, a reference numeral 50 indicates a signal supplying device for
20 supplying signals to examine the monitor 2.

21 Hereinafter, the operation of the apparatus to input and detect the DDC in manufacturing the

1 monitors according to the present invention. will be described in detail with reference to FIGs. 3
2 through 6. When monitor 2 is placed at a position to be examined and adjusted in the facility for
3 producing the monitor 2, the signal supplying device 50 supplies signals for examining and adjusting
4 the monitor 2, for example horizontal synchronization signal and vertical synchronization signal,
5 through a signal cable 55, a microprocessor cable 54, and the like to the monitor 2.

6 That is, when examining and adjusting the monitor 2, a worker places a pallet 60 on a
7 conveyer belt 51 and positions the monitor 2 to be examined on the pallet 51. When operating the
8 conveyer belt 51, then, the pallet 60 having the monitor 2 thereon is carried by the conveyer belt 51.
9 The pallet 60 is stopped at a position that the signal supplying device 50 is disposed by a stopper 57
10 installed at the center portion of the conveyer belt 51.

11 The microprocessor cable 54 and the signal cable 55 are connected to an assembly of a
12 printed circuit board in the monitor 2 at one ends thereof and is in automatic and manual contact with
13 connecting devices such as a micro processor jack 58 and a signal jack 59 of the signal supplying
14 device 50 which are fixed to a frame of the conveyer belt 51 at the other ends thereof.

15 As described above, when the micro processor cable 54 and the signal cable 55 are connected
16 to the connecting devices fixed to the frame of the conveyer belt 51, signals for examining and
17 detecting the monitor 2, for examples the horizontal synchronization signal and the vertical
18 synchronization signal, are supplied through the combination cable 56 from the signal supplying
19 device 50 to the assembly of the printed circuit board 2b.

20 The signals for examining and detecting the monitor 2 are processed in the assembly 2b of
21 the printed circuit board and indicated on the monitor 2 so that the worker can identify the result of

1 examining and detecting the monitor 2 to adjust the DOC of the monitor 2.

2 After the signal supplying device 50 supplies the signals for adjusting and examining the
3 monitor 2 for the monitor 2, the PLC 100 makes the coil RC of the relay 20 to be magnetized and
4 to turn-on the contacts RI and R2. That is, the PLC 100 turns on the relay 20 automatically after the
5 signal supplying device 50 supplies the signals for adjusting and examining the monitor 2 for the
6 monitor 2. Even though the worker do not push a switch button of the mouse 7 or the scanner 6, the
7 PLC 100 can input the DDC into the monitor 2.

8 As described above, the contacts R1 and R2 of the relay 20 are electrically connected with
9 each other to make the DDC to be inputted into the monitor 2 as the contacts RI and R2 of the relay
10 20 are in parallel connected with the start contacts 10a and 10b of the mouse 7 or the start contacts
11 10A and 10B of the scanner 6.

12 Since the input of the DDC can be accomplished by operating the mouse 7 or the scanner 6,
13 the contacts R1 and R2 are preferably connected to a selecting switch 25 in order to select one of the
14 mouse 7 and the scanner 6. That is, when a contact C of the selecting switch 25 is electrically
15 connected to a contact C1 of the selecting switch 25, the contacts R1 and R2 of the relay 20 function
16 as a click contact of the mouse 7. On the other hand, when the contact C of the selecting switch 25
17 is electrically connected to a contact C2 of the selecting switch 25, the contacts RI and R2 of the
18 relay 20 function as a reading contact of the scanner 6.

19 When the DDC is inputted into the monitor 2 in such a manner as described above, a low
20 signal is applied to the zener diode 201 of the interfacing section 200 connected to the DDC pin of
21 the cable 5 to turn-on the transistor 202- In the other words, when the contacts RI and R2 of the relay

1 20 are electrically connected to each other so that the DDC *is* inputted into the monitor 2, the low
2 signal (about 1,5 volt) is applied to the interfacing section 200 to turn-off the transistor 202, whereas
3 when the contacts R1 and R2 of the relay 20 is electrically released from each other so that the DDC
4 is not inputted into the monitor 2, a high signal (about 5 volt) is applied to the interfacing section 200
5 to turn-on the transistor 202.

6 If the DDC is inputted into the monitor 2 and the transistor 202 is turned-off, the first and
7 second switch contacts 213 and 215 are held turned-on as the relay coil 211 can be magnetized. This
8 is the reason that the contact switches 213 and 215 of the relay 210 of the interfacing section 200 are
9 a relay in a B contacting way which is held turned-on when the relay coil 211 is not magnetized and
10 is turned-off when the relay coil 211 is magnetized.

11 If the DDC is inputted into the monitor 2, which in turn makes the transistor 202 to be
12 turned-off, therefore, the light emitting diode 220 is turned on as a closed circuit is formed in the
13 interfacing section 200, in which the electric current is discharged at an earth by way of the light
14 emitting diode 220 and the first contact switch 213. If the DDC is not inputted into the monitor 2
15 and the transistor 202 is turned off, the light emitting diode 220 is turned off as the electric current
16 is discharged at the earth by way of the coil of the relay 210 in the interfacing section 200 and the
17 first contact switch 213 of the relay 210 is turned off. Accordingly, the worker identified the light
18 emitting diode 220 to determine whether or not the DDC is inputted into the monitor 2.

19 When the contacts R1 and R2 of the relay 20 are turned-on according to the control of the
20 PLC 100 and the DDC is normally inputted into the monitor 2, the PLC 100 analyzes the signal
21 outputted from the interfacing section 200 *so* as to determine whether or not the DDC is normally

inputted into the monitor 2.

As shown in FIG. 4, switching times when the input of the DDC is normal are different from that when the input of the DDC is abnormal after the DDC is inputted into the monitor 2. When the input of the DDC is normal, the switching times are in a range of approximately 750 milliseconds to approximately 1.2 seconds, while when the input of the DDC is abnormal, the switching times are in a range of approximately 3.5 seconds to approximately 4.5 seconds.

Accordingly, the signal outputted from the interfacing section 200 is identified at a time, for example 1.5 sec, that the switching times do not overlapped after the DDC is inputted into the monitor 2. If a high frequency signal is not outputted from the outputted signals and the same signal as that before the DDC is inputted into the monitor 2 is outputted, it is determined that the input of the DDC is normal, On the other hand, if the high frequency signal is outputted from the interfacing section 200, it is determined that the input of the DDC is abnormal.

Embodiments of the present invention permit sequences of testing to be programmed into PLC controller100. PLC controller 100 is able to broadcast an alarm via loudspeaker 150 whenever it determines that an input of the DDC is abnormal.

According to the principles of the present invention, the input and examination of the DDC in manufacturing the monitors are automatically carried out so that it is unnecessary that the input and examination of the DDC are operated by the mouse 7 and the scanner 6 and the monitor is identified by the worker after carrying out the input and examination of the DDC. As described in the foregoing paragraphs, the apparatus to input and detect the DDC in manufacturing the monitors according to the present invention is capable of improving a productivity of monitors by

1 automatically inputting and detecting a display data channel of a monitor in manufacturing the
2 monitors, thereby reducing a manufacturing cost of the monitor. The difference between the present
3 invention and the conventional art and the advantages of the present invention will be apparent with
4 reference to a table below.

<Table 1>

	conventional art		present invention	
	input of DDC	detecting of DDC	input of DDC	detecting of DDC
How to operate	manual operation by using a scanner or mouse		automatic operation by using a PLC	
identification of the operation	worker identifies the operation with eyes		worker identifies the operation with LED	
when errors are generated	Worker identifies messages of a monitor with eyes during the operation (impossible immediate response)		Alert by means of an alarm (possible immediate response)	
times for operation	about 5 sec	about 2 sec	0	

12 While the present invention has been particularly shown and described with reference to a
13 particular embodiment thereof, it will be understood by those skilled in the art that various changes
14 in form and detail may be effected therein without departing from the scope of the invention as
15 defined by the appended claims. For example, although these principles have been illustrated for
16 the manufacture of cathode ray type monitors, the present invention may be practiced during the test
17 of any type of monitor, such as, by way of example, a flat panel display or a liquid crystal display.

What is claimed is:

1. An apparatus for inputting and detecting a display data channel by which data relating to a monitor are transmitted to a computer in manufacturing a monitor, comprising:

an inputting device for inputting the display data channel of the monitor into the computer;

a driving device for driving the inputting device with a predetermined electric signal;

an interfacing section for indicating whether the display data channel of the monitor is inputted into the computer and for outputting the same voltage signal as an initial signal, which is switched at a different time according to a result of inputting the display data channel; and

means for controlling the driving device by generating the predetermined electric signal, for analyzing the output signal from the interfacing section, and for determining whether or not the result of inputting the display data channel is a correct.

2. An apparatus for inputting and detecting a display data channel as claimed in claim 1, wherein the inputting device includes a mouse.

3. An apparatus for inputting and detecting a display data channel as claimed in claim 1, wherein the inputting device includes a scanner.

4. An apparatus for inputting and detecting a display data channel as claimed in claim 1, wherein the controlling and determining means includes a programmable logic controller.

1 5. An apparatus for inputting and detecting a display data channel as claimed in claim 1,
2 wherein the interfacing section comprises:

3 a zener diode connected with a pin for the display data channel which connects the computer
4 and the monitor;

5 a transistor having a base connected to an output terminal of the zener diode and being
6 turned-on and turned-off according to a presence of the display data channel;

7 a relay for including a relay coil magnetized when the transistor is turned-on and a first and
8 second relay switches turned-on when the transistor is turned-off; and

9 a light emitting diode for emitting light when the first relay switch is turned-on so that the
10 inputting of the display data channel can be identified.

1 6. An apparatus for inputting and detecting a display data channel as claimed in claim 1,
2 wherein the inputting device includes a mouse and a scanner and further comprises a switch to select
3 one of the mouse and the scanner.

1 7. An apparatus for inputting and detecting a display data channel as claimed in claim 1,
2 wherein after the display data channel is inputted into the computer and the interfacing section
3 outputs a high frequency signal, the determining means determines that the display data channel is
4 normally inputted into the computer if the interfacing section outputs the same signal as the initial
5 signal at a first time, and after the interfacing section continues to output the high frequency signal
6 for a predetermined times after the first time, the determining means determines that the display data

channel is abnormally inputted into the computer if the interfacing section outputs the same signal as the initial signal at a second time.

8. An apparatus for inputting and detecting a display data channel as claimed in claim 7, wherein the first time is in a range of 750 msec-1.5 sec, and the second time is in a range of 3.5 sec-4.5 sec.

9. An apparatus for inputting and detecting a display data channel as claimed in claim 7, wherein when the display data channel is abnormally inputted into the computer, the controlling and determining means raises an alarm by means of an alarm generating device.

10. An apparatus for inputting and detecting a display data channel as claimed in claim 1, wherein the driving device includes a relay switch which is in parallel connection to a contact point for inputting the display data channel of the inputting device and the relay coil magnetized by the predetermined electric signal to operate the relay switch.

11. An apparatus for inputting and detecting a display data channel as claimed in claim 10, wherein after a controlling and detecting signal for the monitor is supplied, the controlling and detecting means magnetizes the relay coil and turns-on the relay switch at a predetermined time thereafter so that the display data channel is inputted into the monitor.

ABSTRACT

An apparatus and process for inputting and detecting a display data channel by which data relating to a monitor are transmitted to a computer in manufacturing a monitor. The apparatus according to the present invention includes an input device which has an automatic signal supplying element, for input the display data channel for the monitor in a facilities for manufacturing the monitor, a driving device for driving the inputting device by a predetermined electric signal, an interfacing section for outputting the same voltage signal as an initial signal, which si switched at a different time according to a result of input the display data channel, and a determining device for generating a predetermined electric signal to control the driving device and for analyzing an output signal from the interfacing section to determine whether or not the display data channel is normally input into the computer.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

JAE-ICK HO

Serial No.: *to be assigned*

Examiner: *to be assigned*

Filed: 30 March 1999

Art Unit: *to be assigned*

For: APPARATUS FOR INPUTTING AND DETECTING A DISPLAY DATA
CHANNEL IN MANUFACTURING A MONITOR


TRANSMITTAL OF DECLARATION

Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

This transmittal accompanies a Declaration without the signature by the inventor(s), for the above-captioned application. A Substitute Declaration with the inventor(s)'s signature will be filed upon receipt of the Serial No. for the above-captioned application.

Respectfully submitted,



Robert E. Bushnell,
Attorney for the Applicant
Registration No.: 27,774

Suite 300, 1522 "K" Street, N.W.
Washington, D.C. 20005
(202) 638-5740

Folio: P55657
Date: 03/30/99
I.D.: REB/kf

FIG 1

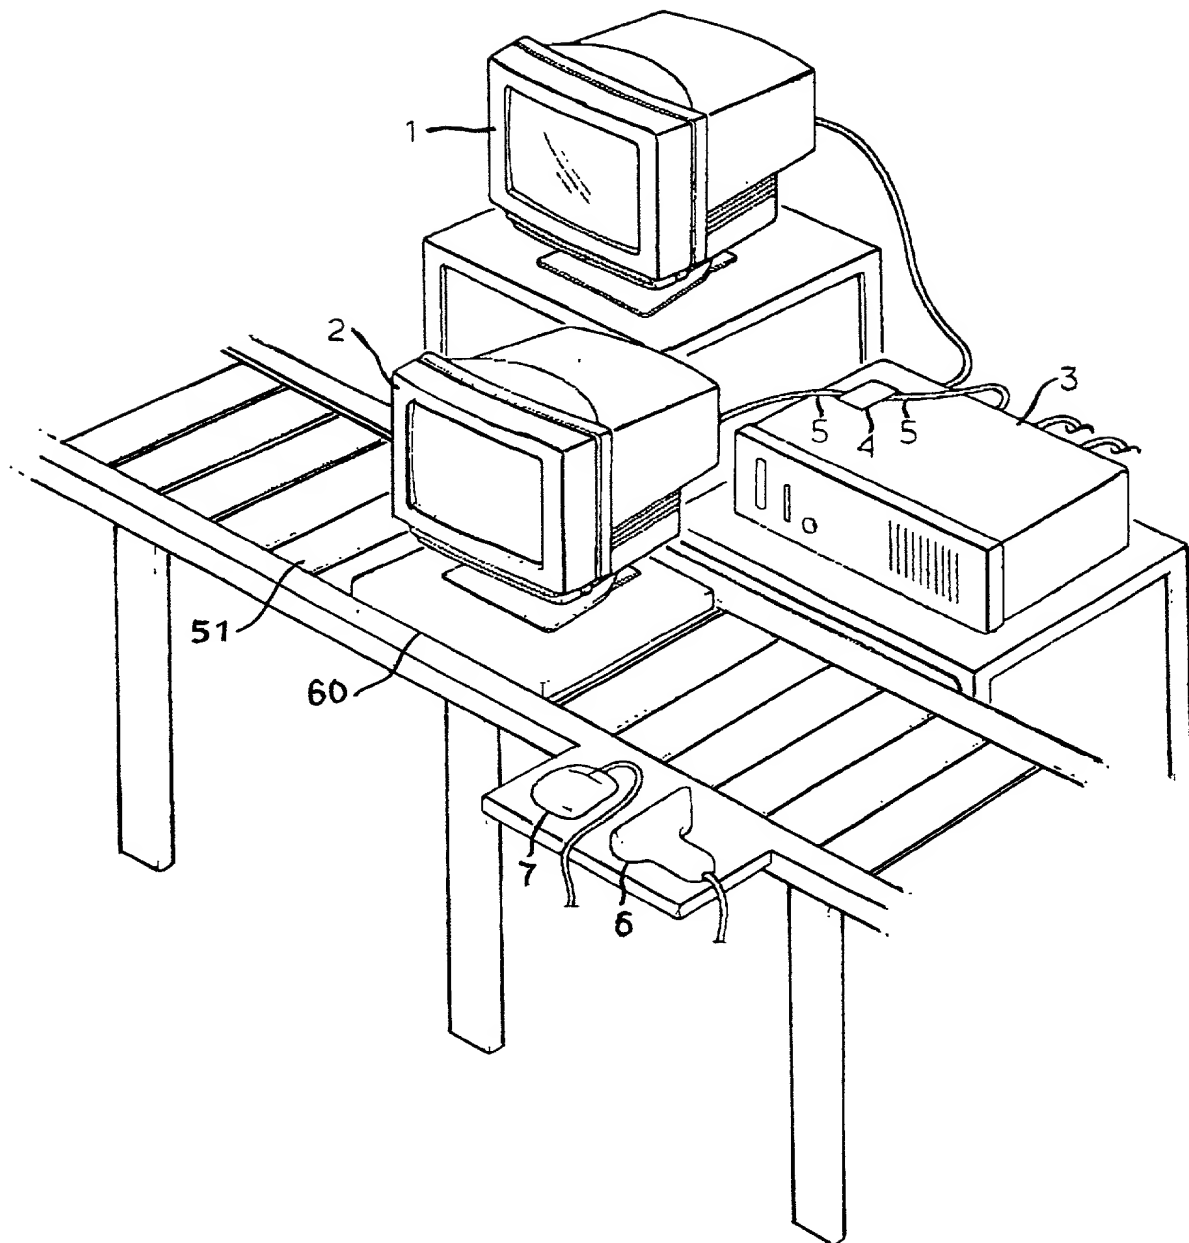


FIG 2

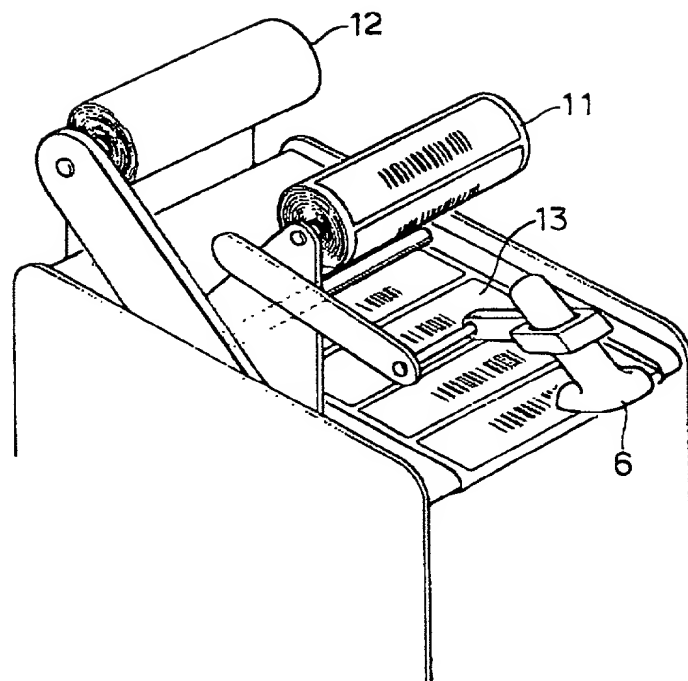


FIG 4

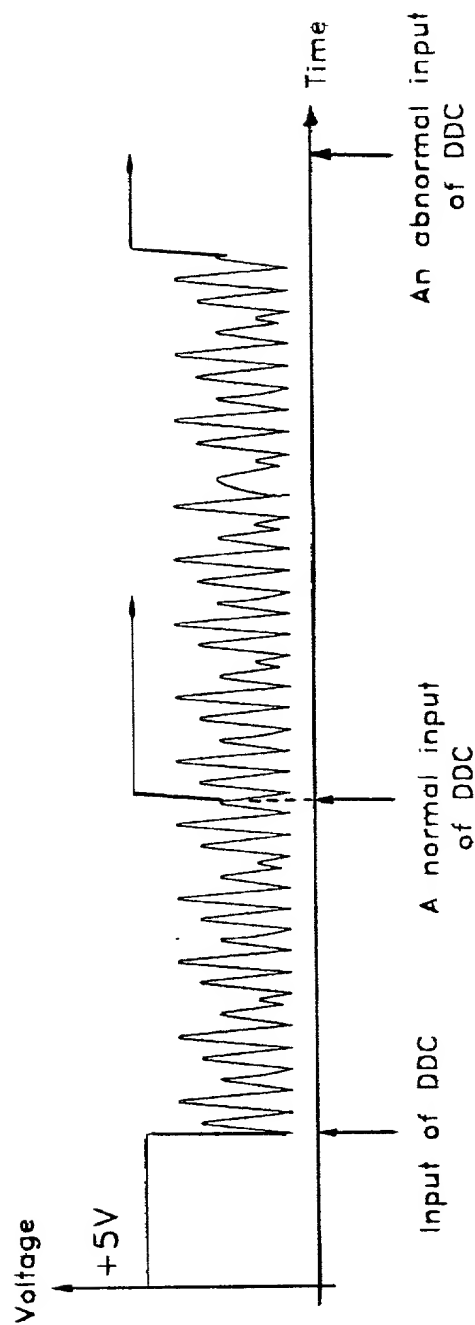


FIG 5


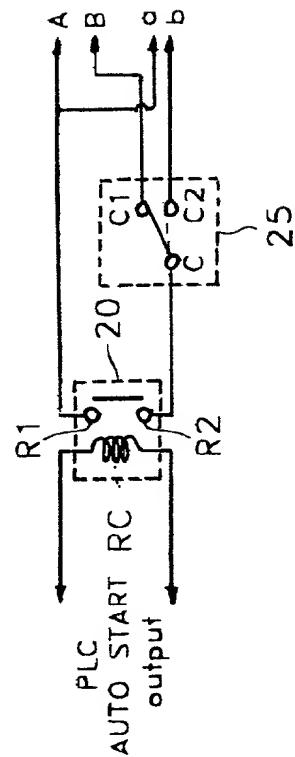


FIG 6

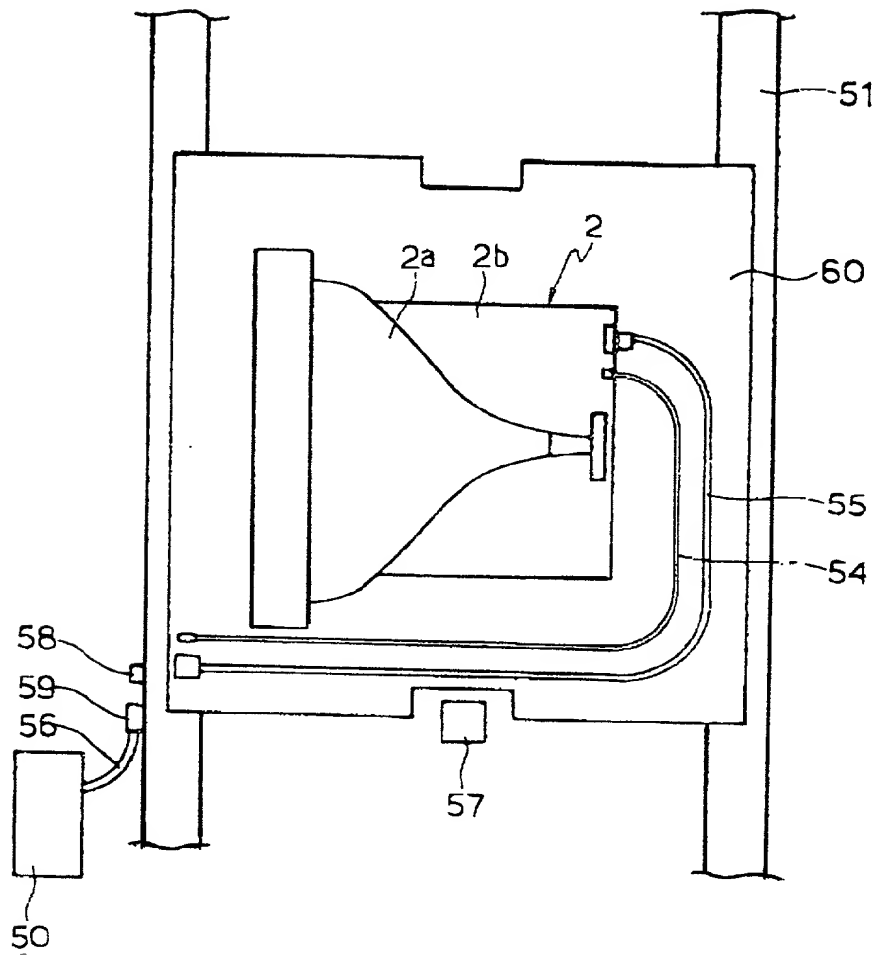

DECLARATION

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (*if only one name is listed below*), or an original, first and joint inventor (*if plural names are listed below*), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: APPARATUS FOR INPUTTING AND DETECTING A DISPLAY DATA CHANNEL IN MANUFACTURING A MONITOR

the specification of which either is attached hereto or otherwise accompanies this Declaration, or:

☐ was filed in the U.S. Patent & Trademark Office on _____ and assigned Serial No. _____.

☐ and (*if applicable*) was amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, or §119(e) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Priority Claimed:

Yes [☒] No [☐]

<u>10975/1998</u>	<u>Republic of Korea</u>	<u>30 March 1998</u>
(Application Number)	(Country)	(Day/Month/Year filed)
_____	_____	_____
(Application Number)	(Country)	(Day/Month/Year filed)

Yes [☐] No [☐]

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(STATUS: patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(STATUS: patented, pending, abandoned)

I hereby revoke all previously granted powers of attorney and appoint the following attorneys: Robert E. Bushnell, Reg. No. 27,774, Michael D. Parker, Reg. No. 34,973, and Henry M. Zykorie, Reg. No. 27,477, to prosecute this application and to transact all business in the U.S. Patent & Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Robert E. Bushnell,
Attorney-at-Law
Suite 300, 1522 "K" Street, N.W.
Washington, D.C. 20005-1202

Payor No. 008439
Area Code: 202-638-5740

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: JAE-ICK HO

Citizenship: Republic of Korea

Inventor's signature: _____
Residence & Post Office Address: 195-10, Maetan 1-dong, Paldal-gu, Suwon, Kyonggi-do, Republic of Korea

Date: _____

FULL NAME OF SECOND JOINT INVENTOR: _____

Citizenship: _____

Inventor's signature: _____
Residence & Post Office Address: _____

Date: _____

FULL NAME OF THIRD JOINT INVENTOR: _____

Citizenship: _____

Inventor's signature: _____
Residence & Post Office Address: _____

Date: _____

FULL NAME OF FOURTH JOINT INVENTOR: _____

Citizenship: _____

Inventor's signature: _____
Residence & Post Office Address: _____

Date: _____